

ROOTS™ Universal RAI-G® Rotary Positive Gas Blowers

Frames 32 thru 615

BASIC BLOWER DESCRIPTION


Universal RAI-G® gas blowers are heavy duty rotary blowers designed with mechanical seals and rugged steel mounting feet. Optional feet are available for horizontal installations. The compact, sturdy design is engineered for continuous service when operated in accordance with speed and pressure ratings.

The basic model consists of a cast iron casing, carburized and ground alloy steel spur timing gears secured to steel shafts with a taper mounting and locknut, and cast iron involute impellers. Oversized anti-friction bearings are used, with a cylindrical roller bearing at the drive shaft to withstand V-belt pull. The Universal RAI-G® features splash oil lube on the gear end and grease lube on the drive end. ROOT's exclusive "figure-eight" gearbox design improves oil distribution to maximize gear and bearing life.

Each unit is mechanically tested and given a 15 psig static leak test. A 1/8" NPT purge port is provided at each seal for buffer gas application as required. After testing, the unit is sprayed with a protective paint, and boxed or skid mounted for delivery.

Accessories are available through our distributors. ROOTS™ Synthetic Oil and grease is recommended to maintain warranty.

OUTLINE DRAWING & DIMENSIONAL TABLE

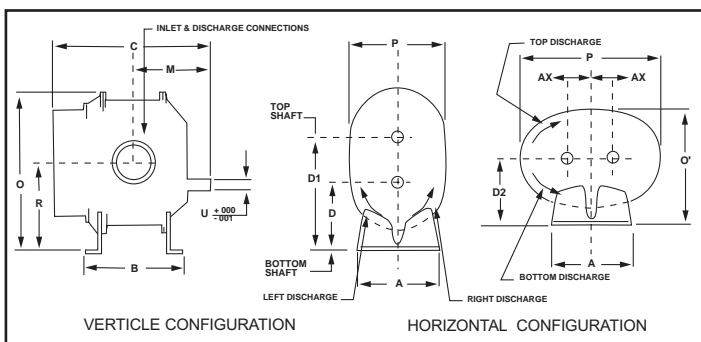


Frame	A	A'	B	C	D	D1	D2	M	O	O'	P	P'	R	U	INLET DISCH.	AX	WGT
32	7.25	7.25	6.75	11.25	5.00	8.50	5.00	5.81	12.81	8.88	7.75	12.13	6.75	.750	1.25 NPT	1.75	69
33	7.25	7.25	7.63	12.13	5.00	8.50	5.00	6.25	12.81	8.88	7.75	12.13	6.75	.750	2.0 NPT	1.75	74
36	7.25	7.25	10.00	14.63	5.00	8.50	5.00	7.56	12.81	8.88	7.75	12.13	6.75	.750	2.5 NPT	1.75	102
42	8.00	8.00	7.25	13.00	6.25	10.25	6.25	6.86	15.06	10.63	8.75	13.63	8.25	.875	1.5 NPT	2.00	88
45	8.00	8.00	10.00	15.50	6.25	10.25	6.25	8.00	15.06	10.63	8.75	13.63	8.25	.875	2.5 NPT	2.00	109
47	8.00	8.00	11.75	17.63	6.25	10.25	6.25	9.25	15.06	10.50	8.50	13.63	8.25	.875	3.0 NPT	2.00	128
53	10.50	10.50	8.38	15.38	6.25	11.25	6.75	8.18	17.38	11.88	10.25	17.25	8.75	1.125	2.5 NPT	2.50	143
56	10.50	10.50	11.00	18.00	6.25	11.25	6.75	9.19	17.38	12.25	11.00	17.25	8.75	1.125	4.0 NPT	2.50	170
59	10.50	10.50	14.00	21.18	6.25	11.25	6.75	11.19	17.38	12.25	11.00	17.25	8.75	1.125	4.0 NPT	2.50	204
65	11.00	11.00	10.00	18.38	8.75	14.75	8.75	9.19	21.63	15.13	12.75	19.75	11.75	1.375	3.0 NPT	3.00	245
68	11.00	11.00	13.00	21.38	8.75	14.75	8.75	10.82	21.63	15.13	12.75	19.75	11.75	1.375	5.0 NPT	3.00	285
615	11.00	11.00	20.00	28.38	8.75	14.75	8.75	14.32	21.63	16.25	15.00	19.75	11.75	1.375	.60 FLG	3.00	425



DESIGN AND CONSTRUCTION FEATURES

1. Mechanical seals
2. Rigid one-piece cast iron casing
3. Anti-friction bearings
4. Splash oil lubricated spur timing gears
5. Connections in standard pipe sizes
6. Straight, precision machined two-lobe impellers
7. Ground steel shafts
8. Detachable steel mounting feet

OPERATING PRINCIPLE

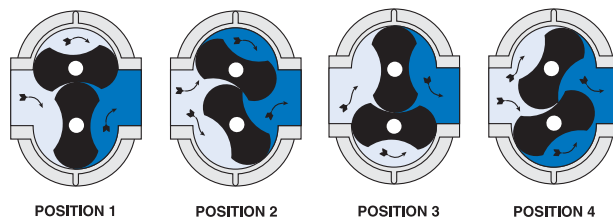

Two figure-eight lobe impellers mounted on parallel shafts rotate in opposite directions. As each impeller passes the blower inlet, it traps a definite volume of gas and carries it around the case to the blower outlet, where the gas is discharged. With constant speed operation, the displaced volume is essentially the same regardless of pressure, temperature or barometric pressure.

Timing gears control the relative position of the impellers to each other and maintain small but definite clearances. This allows operation without lubrication being required inside the gas casing.



Roots

PERFORMANCE TABLE: ROOTS Universal URAI-G

Frame Size	Speed RPM	4 PSI		5 PSI		6 PSI		7 PSI		8 PSI		9 PSI		10 PSI		12 PSI		13 PSI		14 PSI		15 PSI		VACUUM DATA		
		CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	INHG/	CFM	BHP
32U	1750	45	1.4	41	1.7	37	2.1	34	2.4	31	2.8	28	3.1	25	3.5									12	26	2.0
	2950	99	2.4	95	3.0	91	3.6	88	4.2	85	4.7	82	5.3	79	5.9									15	68	4.3
	3550	126	3.0	122	3.7	118	4.4	115	5.1	112	5.8	109	6.5	106	7.2									16	90	5.6
33U	1750	64	1.9	58	2.4	54	2.9	49	3.3	45	3.8	41	4.3	38	4.7									12	39	2.8
	2950	138	3.3	132	4.1	128	4.9	123	5.7	119	6.5	115	7.3	112	8.1									15	97	5.9
	3550	174	4.1	169	5.0	165	6.0	160	6.9	156	7.9	152	8.8	149	9.8									15	134	7.2
36U	1750	116	3.2	109	3.9	102	4.7	96	5.5															13	74	5.0
	2950	238	5.5	231	6.8	224	8.1	218	9.4															15	181	9.8
	3550	300	6.7	292	8.3	286	9.9	279	11.5															15	243	11.9
42U	1750	68	1.9	64	2.4	59	2.8	56	3.3	52	3.7	49	4.2	46	4.7									14	42	3.0
	2950	141	3.3	136	4.1	132	4.9	128	5.7	125	6.5	122	7.2	119	8.0									16	101	6.2
	3550	177	4.1	172	5.1	168	6.0	165	7.0	161	7.9	158	8.8	155	9.8									16	137	7.6
45U	1750	144	3.8	136	4.7	129	5.6	122	6.6	116	7.5	110	8.4	104	9.3									13	98	5.9
	2950	289	6.7	281	8.2	274	9.8	267	11.3	261	12.9	255	14.4	249	16.0									16	218	12.5
	3550	362	8.2	354	10.1	346	12.0	340	13.9	333	15.7	328	17.6	322	19.5									16	291	15.2
47U	1750	193	5.0	183	6.2	174	7.4	166	8.6															14	126	8.4
	2950	385	8.8	375	10.8	366	12.9	357	14.9															15	307	15.4
	3550	480	10.9	470	13.3	461	15.8	453	18.3															15	402	18.8
53U	1170	99	2.7	92	3.4	86	4.1	81	4.8	76	5.4	71	6.1	66	6.8									12	67	4.3
	1750	175	4.2	168	5.2	163	6.2	157	7.2	152	8.2	147	9.2	143	10.3									15	124	7.5
	2850	320	7.4	313	9.1	308	10.7	302	12.3	297	14.0	292	15.6	288	17.2									16	262	13.4
56U	1170	174	4.6	164	5.7	155	6.9	147	8.0	139	9.1	132	10.2	125	11.4									13	117	7.2
	1750	302	7.0	292	8.7	283	10.4	275	12.1	267	13.8	260	15.5	253	17.2									15	225	12.6
	2850	546	12.2	536	15.0	527	17.7	518	20.5	511	23.2	503	26.0	496	28.7									16	468	21.0
59U	1170	272	6.7	259	8.4	248	10.0	238	11.7															14	188	11.4
	1750	459	10.3	447	12.8	436	15.2	425	17.7															15	363	18.4
	2850	815	18.0	802	22.0	791	26.0	780	30.0															15	718	30.8
65U	1170	201	5.2	190	6.4	181	7.7	172	8.9	164	10.2	157	11.5	150	12.7									14	132	8.7
	1750	343	8.0	333	9.9	324	11.8	315	13.7	307	15.6	300	17.4	293	19.3									16	252	15.1
	2350	491	11.4	481	13.9	471	16.4	463	19.0	455	21.5	447	24.0	426	26.5									16	400	20.6
68U	1170	322	8.3	305	10.3	291	12.3	277	14.3	264	16.3	252	18.3	241	20.3									14	211	13.9
	1750	551	12.7	535	15.7	520	18.7	506	21.8	493	24.8	481	27.8	470	30.8									16	405	24.0
	2350	788	17.8	772	21.8	757	25.9	743	29.9	703	34.0	718	38.0	707	42.1									16	642	32.8
615U	1170	603	15.4	572	19.1	544	22.9	519	26.7															11	483	20.5
	1750	1032	23.2	1001	29.1	973	34.7	948	40.4															12	885	33.7
	2350	1476	32.4	1445	40.0	1417	47.6	1392	55.2															12	1329	46.0

NOTES: 1. Performance based on inlet methane at standard pressure of 14.7 psia, standard temperature of 68°F, and specific gravity of 0.55.
 2. Vacuum ratings based on inlet methane at standard temperature of 68°F, discharge pressure of 30" Hg and specific gravity of 0.55.



Roots

S-60A01
 September 2003

Copyright 2003 Dresser, Inc. All rights reserved.
 Dresser Design and Universal RAI-G® are registered trademarks of Dresser, Inc.
 ROOTS™ is a trademark of Dresser, Inc.
 All information subject to change without notice.

Dresser ROOTS

2135 Hwy 6 South
 Houston, TX 77077
 Ph: 281-966-4700
 Fx: 281-966-4309
 Toll Free (US): 877-363-ROOT(S)

Dresser ROOTS

Connorsville
 900 West Mount Street
 Connorsville, IN 47331
 Ph: 765-827-9200
 Fx: 765-827-9266

Dresser ROOTS

Holmes Operation
 PO Box B7
 Off St. Andrews Rd
 Turnbridge, Huddersfield
 England HD1 6RB
 Ph: +44-1484-422222
 Fx: +44-1484-422668

website: www.rootsblower.com ♦ email: ROOTS@dresser.com