Specifications type KB 43..

Double-stage (side channel blowers)

– NSK bearings with high temperature grease
– CE, UL and CSA approved
– All units are QC inspected by Klee
– Built-in bi-metal switch for 1-phase models
– Available with 3-phase IE2/IE3 motor
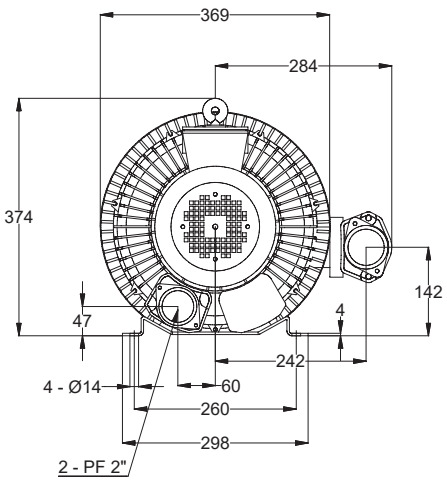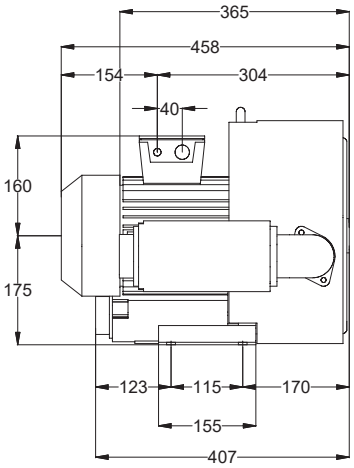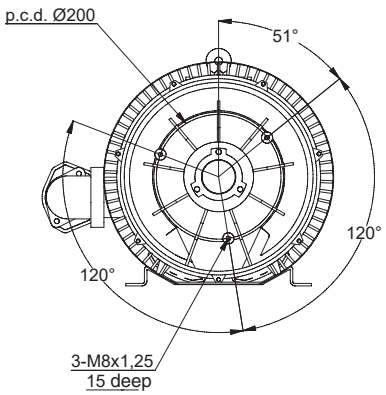
Type no.		KB-4337	KB-4346
Phases		3	3
Output kW	50 Hz	3.4	4.0
	60 Hz	3.7	4.6
Voltage Volt	50 Hz	230/400	230/400
	60 Hz	276/480	276/480
Current Amp	50 Hz	12.5/7.2	14.3/8.2
	60 Hz	13.5/7.8	16.2/9.3
Vacuum mbar	50 Hz	345	355
	60 Hz	405	410
Pressure mbar	50 Hz	410	460
	60 Hz	415	495
Airflow m^3/min	50 Hz	3.7	3.7
	60 Hz	4.5	4.5
Insulation class		F	F
Weight Kg		43	45